


Series description: Wilo-Helix FIRST V

Wilo-Helix FIRST V

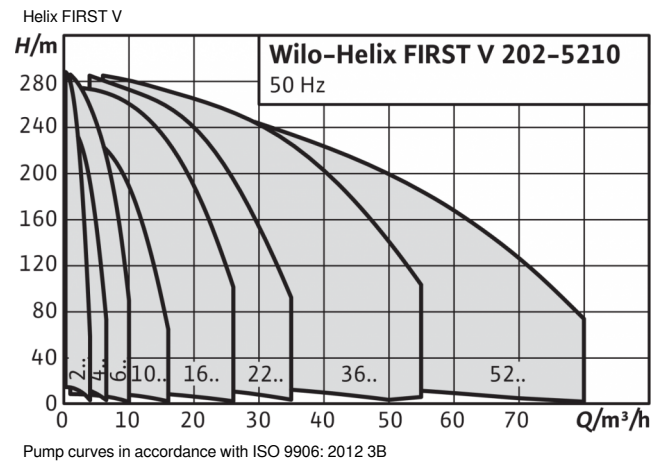

Design type

Non-self-priming, high-efficiency multistage high-pressure centrifugal pump in vertical design with in-line connections

Application

- Water distribution and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Fire extinguishing systems
- Washing systems
- Irrigation

Equipment/function

- Corrosion-resistant impellers, guide vanes and stage housings

Scope of delivery

- Helix FIRST V high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix FIRST 2 – 16 (version PN16 with oval flanges): Cast iron counter flanges with the corresponding screws, nuts and gaskets

Special features/product advantages

- Efficiency-optimised, laser-welded, optimised 2D/3D hydraulics
- Corrosion-resistant impellers, guide vanes and stage housings
- Flow and degassing-optimised hydraulic parts
- Reinforced pump housing, flow and NPSH optimised
- Space-saving and easy maintenance thanks to compact design
- Particularly sturdy coupling guard

Series description: Wilo-Helix FIRST V

Type key

<p>Example: Helix FIRST V</p> <p>36 06 2 5</p> <p>25</p> <p>E K S</p> <p>400 50</p>	<p>Helix FIRST V 3606/2-5/25/E/KS/./400-50 Vertical high-pressure multistage centrifugal pump in in-line design Flow rate in m³/h Number of impellers Number of trimmed impellers Pump material 5 = Pump housing EN-GJL-250 cataphoretic-coated Hydraulics 1.4307 (AISI 304L) Maximum operating pressure in bar 16 = Helix FIRST V 2.. to 16..: 16 bar: Oval flange PN 16 Helix FIRST V 22.. to 52..: 16 bar: DIN round flange PN 16 25 = Helix FIRST V 2.. to 16.. -5/25/E/S/..: 16 bar: DIN round flange PN 25 Helix FIRST V 2.. to 16.. -5/25/E/KS/..: 25 bar: DIN round flange PN 25 Helix FIRST V 22.. to 52..: 25 bar: DIN round flange PN 25 30 = Helix FIRST V 2.. to 52..: 30 bar: DIN round flange PN 40 Seal type E = EPDM Cartridge type mechanical seal The coupling guard is on a line with suction and discharge ports of the pump. Connection voltage in V Frequency in Hz</p>
---	---

Technical data

- Electrical connection: 3~400 V ($\pm 10\%$), 50 Hz
 - ≤ 4 kW 230 V/ 400 V; Δ/Y
 - > 4 kW 400 V/ 690 V; Δ/Y
- Fluid temperature range: -20 to 120 °C
- Max. operating pressure: 16, 25 or 30 bar
- Protection class: IP 55
- Max. ambient temperature: -15 °C – +40 °C
- Helix FIRST V 2 – 16: PN 16 with oval flanges, PN 25/PN 40 with round flanges according to ISO 2531 and ISO 7005
- Helix FIRSTV 22 – 52: PN 16/PN 25/PN 40 with round flanges according to ISO 2531 and ISO 7005


Materials

- Impellers, stage housings and guide vanes of stainless steel 1.4307 (AISI 304L)
- Pump housing made of EN-GJL-250, cataphoretically coated
- Shaft made of stainless steel 1.4057 (AISI 304L)
- Sleeve under the mechanical seal 1.4404 (AISI 316L)
- O-Ring made of EPDM
- Jacket pipe made of stainless steel 1.4301 (AISI 304)

Description/construction

- Pumps can be adapted to specific circumstances on request (e.g. motor protection, ATEX, extended ambient temperature range).

Duty chart: Wilo-Helix FIRST V

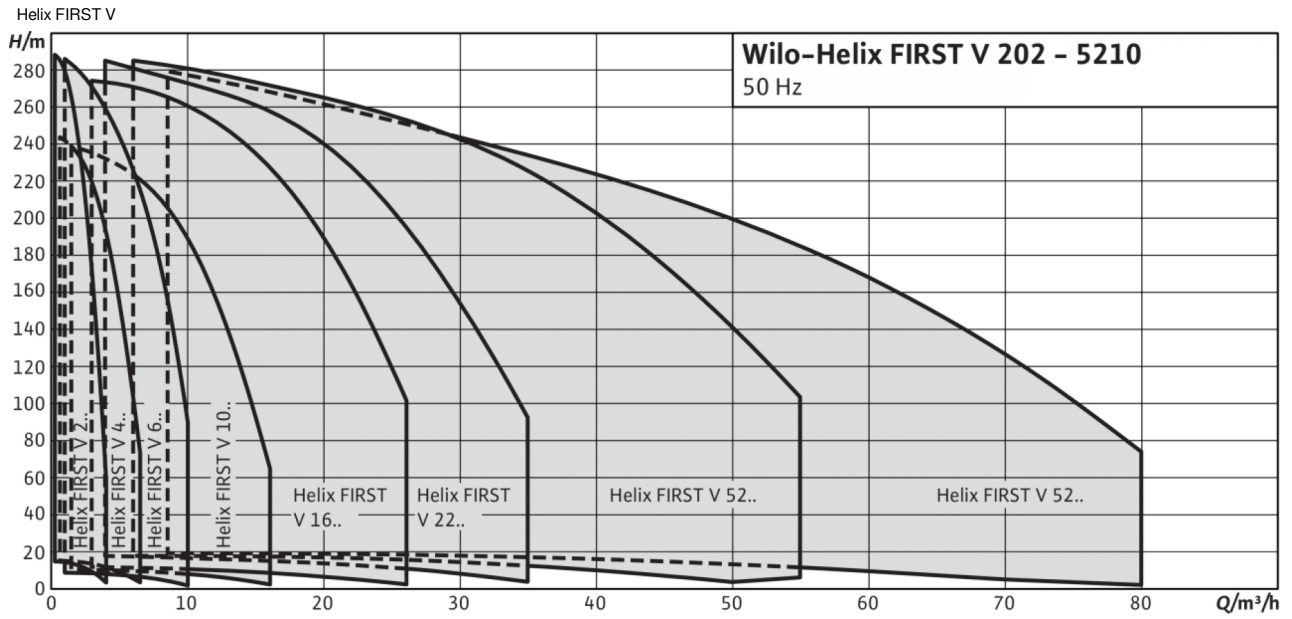

Pump curves in accordance with ISO 9906:2012 3B

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 633-5/30/E/KS/	7.50 kW	DN 32	147.0 kg	4201177
Helix FIRST V 630-5/30/E/KS/	7.50 kW	DN 32	145.0 kg	4201176
Helix FIRST V 628-5/30/E/KS/	5.50 kW	DN 32	126.0 kg	4201175
Helix FIRST V 625-5/30/E/KS/	5.50 kW	DN 32	125.0 kg	4201174
Helix FIRST V 431-5/30/E/KS/	4.00 kW	DN 25	114.0 kg	4201122
Helix FIRST V 429-5/30/E/KS/	4.00 kW	DN 25	85.0 kg	4201121
Helix FIRST V 239-5/30/E/KS/	3.00 kW	DN 25	117.0 kg	4201072
Helix FIRST V 236-5/30/E/KS/	3.00 kW	DN 25	115.0 kg	4201071
Helix FIRST V 233-5/30/E/KS/	3.00 kW	DN 25	114.0 kg	4201070
Helix FIRST V 231-5/30/E/KS/	3.00 kW	DN 25	85.0 kg	4201069
Helix FIRST V 229-5/30/E/KS/	2.20 kW	DN 25	77.0 kg	4201068
Helix FIRST V 1621-5/30/E/KS/	15.00 kW	DN 50	225.0 kg	4201015
Helix FIRST V 1618-5/30/E/KS/	15.00 kW	DN 50	220.0 kg	4201014
Helix FIRST V 1616-5/30/E/KS/	11.00 kW	DN 50	167.0 kg	4201013
Helix FIRST V 1023-5/30/E/KS/	9.00 kW	DN 40	165.0 kg	4200977
Helix FIRST V 1021-5/30/E/KS/	7.50 kW	DN 40	147.0 kg	4200976
Helix FIRST V 5210-5/30/E/KS/	37.00 kW	DN 80	352.0 kg	4200642
Helix FIRST V 5210/2-5/30/E/KS/	37.00 kW	DN 80	352.0 kg	4200641
Helix FIRST V 5209-5/30/E/KS/	37.00 kW	DN 80	348.0 kg	4200640
Helix FIRST V 3611-5/30/E/KS/	37.00 kW	DN 65	339.0 kg	4200639
Helix FIRST V 3611/2-5/30/E/KS/	30.00 kW	DN 65	336.0 kg	4200638
Helix FIRST V 3610-5/30/E/KS/	30.00 kW	DN 65	333.0 kg	4200637
Helix FIRST V 2216-5/30/E/KS/	22.00 kW	DN 50	244.0 kg	4200636
Helix FIRST V 2215-5/30/E/KS/	18.50 kW	DN 50	243.0 kg	4200635
Helix FIRST V 2214-5/30/E/KS/	18.50 kW	DN 50	241.0 kg	4200634
Helix FIRST V 623-5/25/E/KS/	5.50 kW	DN 32	123.0 kg	4201172
Helix FIRST V 621-5/25/E/KS/	5.50 kW	DN 32	122.0 kg	4201170
Helix FIRST V 620-5/25/E/KS/	4.00 kW	DN 32	87.0 kg	4201169
Helix FIRST V 618-5/25/E/KS/	4.00 kW	DN 32	85.0 kg	4201167
Helix FIRST V 616-5/25/E/KS/	4.00 kW	DN 32	84.0 kg	4201164
Helix FIRST V 615-5/25/E/KS/	3.00 kW	DN 32	83.0 kg	4201163
Helix FIRST V 614-5/25/E/S/	3.00 kW	DN 32	79.0 kg	4201162
Helix FIRST V 613-5/25/E/S/	3.00 kW	DN 32	78.0 kg	4201159
Helix FIRST V 612-5/25/E/S/	3.00 kW	DN 32	74.0 kg	4201157
Helix FIRST V 611-5/25/E/S/	2.20 kW	DN 32	56.0 kg	4201154
Helix FIRST V 610-5/25/E/S/	2.20 kW	DN 32	54.0 kg	4201151
Helix FIRST V 609-5/25/E/S/	2.20 kW	DN 32	54.0 kg	4201148
Helix FIRST V 608-5/25/E/S/	1.50 kW	DN 32	52.0 kg	4201145
Helix FIRST V 607-5/25/E/S/	1.50 kW	DN 32	51.0 kg	4201142
Helix FIRST V 606-5/25/E/S/	1.10 kW	DN 32	44.8 kg	4201139
Helix FIRST V 605-5/25/E/S/	1.10 kW	DN 32	44.1 kg	4201136
Helix FIRST V 604-5/25/E/S/	0.75 kW	DN 32	42.5 kg	4201132
Helix FIRST V 603-5/25/E/S/	0.55 kW	DN 32	31.5 kg	4201130
Helix FIRST V 602-5/25/E/S/	0.55 kW	DN 32	30.8 kg	4201127
Helix FIRST V 601-5/25/E/S/	0.37 kW	DN 32	29.6 kg	4201124
Helix FIRST V 426-5/25/E/KS/	4.00 kW	DN 25	84.0 kg	4201120
Helix FIRST V 424-5/25/E/KS/	3.00 kW	DN 25	81.0 kg	4201119

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 422-5/25/E/KS/	3.00 kW	DN 25	81.0 kg	4201118
Helix FIRST V 420-5/25/E/KS/	3.00 kW	DN 25	79.0 kg	4201117
Helix FIRST V 418-5/25/E/KS/	2.20 kW	DN 25	71.0 kg	4201115
Helix FIRST V 416-5/25/E/S/	2.20 kW	DN 25	53.0 kg	4201114
Helix FIRST V 414-5/25/E/S/	2.20 kW	DN 25	52.0 kg	4201111
Helix FIRST V 413-5/25/E/S/	2.20 kW	DN 25	52.0 kg	4201108
Helix FIRST V 412-5/25/E/S/	1.50 kW	DN 25	50.0 kg	4201105
Helix FIRST V 411-5/25/E/S/	1.50 kW	DN 25	49.5 kg	4201102
Helix FIRST V 410-5/25/E/S/	1.50 kW	DN 25	49.0 kg	4201099
Helix FIRST V 409-5/25/E/S/	1.10 kW	DN 25	43.0 kg	4201096
Helix FIRST V 408-5/25/E/S/	1.10 kW	DN 25	42.6 kg	4201093
Helix FIRST V 407-5/25/E/S/	1.10 kW	DN 25	42.1 kg	4201090
Helix FIRST V 406-5/25/E/S/	0.75 kW	DN 25	40.8 kg	4201087
Helix FIRST V 405-5/25/E/S/	0.75 kW	DN 25	35.8 kg	4201084
Helix FIRST V 404-5/25/E/S/	0.55 kW	DN 25	29.5 kg	4201081
Helix FIRST V 403-5/25/E/S/	0.37 kW	DN 25	27.7 kg	4201078
Helix FIRST V 402-5/25/E/S/	0.37 kW	DN 25	27.5 kg	4201075
Helix FIRST V 226-5/25/E/KS/	2.20 kW	DN 25	75.0 kg	4201066
Helix FIRST V 224-5/25/E/KS/	2.20 kW	DN 25	74.0 kg	4201064
Helix FIRST V 222-5/25/E/KS/	2.20 kW	DN 25	74.0 kg	4201062
Helix FIRST V 220-5/25/E/KS/	2.20 kW	DN 25	72.0 kg	4201060
Helix FIRST V 218-5/25/E/KS/	1.50 kW	DN 25	70.0 kg	4201058
Helix FIRST V 216-5/25/E/S/	1.50 kW	DN 25	52.0 kg	4201057
Helix FIRST V 214-5/25/E/S/	1.10 kW	DN 25	45.5 kg	4201054
Helix FIRST V 213-5/25/E/S/	1.10 kW	DN 25	45.4 kg	4201051
Helix FIRST V 212-5/25/E/S/	1.10 kW	DN 25	44.5 kg	4201048
Helix FIRST V 211-5/25/E/S/	1.10 kW	DN 25	44.0 kg	4201045
Helix FIRST V 210-5/25/E/S/	0.75 kW	DN 25	42.7 kg	4201042
Helix FIRST V 209-5/25/E/S/	0.75 kW	DN 25	42.2 kg	4201039
Helix FIRST V 208-5/25/E/S/	0.75 kW	DN 25	41.8 kg	4201036
Helix FIRST V 207-5/25/E/S/	0.55 kW	DN 25	35.5 kg	4201033
Helix FIRST V 206-5/25/E/S/	0.55 kW	DN 25	30.5 kg	4201030
Helix FIRST V 205-5/25/E/S/	0.55 kW	DN 25	30.0 kg	4201027
Helix FIRST V 204-5/25/E/S/	0.37 kW	DN 25	28.5 kg	4201024
Helix FIRST V 203-5/25/E/S/	0.37 kW	DN 25	28.0 kg	4201021
Helix FIRST V 202-5/25/E/S/	0.37 kW	DN 25	27.6 kg	4201018
Helix FIRST V 1613-5/25/E/KS/	9.00 kW	DN 50	161.0 kg	4201009
Helix FIRST V 1612-5/25/E/KS/	9.00 kW	DN 50	158.0 kg	4201007
Helix FIRST V 1611-5/25/E/KS/	7.50 kW	DN 50	115.0 kg	4201005
Helix FIRST V 1610-5/25/E/KS/	7.50 kW	DN 50	114.0 kg	4201003
Helix FIRST V 1609-5/25/E/KS/	7.50 kW	DN 50	112.0 kg	4201001
Helix FIRST V 1608-5/25/E/S/	5.50 kW	DN 50	86.0 kg	4201000
Helix FIRST V 1607-5/25/E/S/	5.50 kW	DN 50	84.0 kg	4200997
Helix FIRST V 1606-5/25/E/S/	4.00 kW	DN 50	78.0 kg	4200994
Helix FIRST V 1605-5/25/E/S/	4.00 kW	DN 50	77.0 kg	4200991
Helix FIRST V 1604-5/25/E/S/	3.00 kW	DN 50	75.0 kg	4200988
Helix FIRST V 1603-5/25/E/S/	2.20 kW	DN 50	56.0 kg	4200985

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 1602-5/25/E/S/	1.50 kW	DN 50	54.0 kg	4200982
Helix FIRST V 1601-5/25/E/S/	0.75 kW	DN 50	43.0 kg	4200979
Helix FIRST V 1019-5/25/E/KS/	7.50 kW	DN 40	146.0 kg	4200975
Helix FIRST V 1017-5/25/E/KS/	7.50 kW	DN 40	144.0 kg	4200974
Helix FIRST V 1015-5/25/E/KS/	5.50 kW	DN 40	96.0 kg	4200972
Helix FIRST V 1013-5/25/E/KS/	5.50 kW	DN 40	95.0 kg	4200969
Helix FIRST V 1012-5/25/E/S/	5.50 kW	DN 40	90.0 kg	4200968
Helix FIRST V 1011-5/25/E/S/	4.00 kW	DN 40	84.0 kg	4200965
Helix FIRST V 1010-5/25/E/S/	4.00 kW	DN 40	79.0 kg	4200962
Helix FIRST V 1009-5/25/E/S/	4.00 kW	DN 40	78.0 kg	4200959
Helix FIRST V 1008-5/25/E/S/	3.00 kW	DN 40	77.0 kg	4200956
Helix FIRST V 1007-5/25/E/S/	3.00 kW	DN 40	76.0 kg	4200953
Helix FIRST V 1006-5/25/E/S/	2.20 kW	DN 40	57.0 kg	4200950
Helix FIRST V 1005-5/25/E/S/	2.20 kW	DN 40	56.0 kg	4200947
Helix FIRST V 1004-5/25/E/S/	1.50 kW	DN 40	54.0 kg	4200944
Helix FIRST V 1003-5/25/E/S/	1.10 kW	DN 40	43.3 kg	4200941
Helix FIRST V 1002-5/25/E/S/	0.75 kW	DN 40	41.6 kg	4200938
Helix FIRST V 1001-5/25/E/S/	0.55 kW	DN 40	35.6 kg	4200935
Helix FIRST V 5209/2-5/25/E/KS/	37.00 kW	DN 80	348.0 kg	4200622
Helix FIRST V 5208-5/25/E/KS/	30.00 kW	DN 80	342.0 kg	4200621
Helix FIRST V 5208/2-5/25/E/KS/	30.00 kW	DN 80	342.0 kg	4200620
Helix FIRST V 5207-5/25/E/KS/	30.00 kW	DN 80	339.0 kg	4200619
Helix FIRST V 5207/2-5/25/E/KS/	30.00 kW	DN 80	339.0 kg	4200618
Helix FIRST V 5206-5/25/E/KS/	22.00 kW	DN 80	261.0 kg	4200617
Helix FIRST V 5206/2-5/25/E/KS/	22.00 kW	DN 80	261.0 kg	4200616
Helix FIRST V 5205-5/25/E/KS/	18.50 kW	DN 80	257.0 kg	4200615
Helix FIRST V 5205/2-5/25/E/KS/	18.50 kW	DN 80	257.0 kg	4200614
Helix FIRST V 5204-5/25/E/KS/	15.00 kW	DN 80	214.0 kg	4200613
Helix FIRST V 5204/2-5/25/E/KS/	15.00 kW	DN 80	214.0 kg	4200612
Helix FIRST V 3610/2-5/25/E/KS/	30.00 kW	DN 65	333.0 kg	4200599
Helix FIRST V 3609-5/25/E/KS/	30.00 kW	DN 65	330.0 kg	4200598
Helix FIRST V 3609/2-5/25/E/KS/	30.00 kW	DN 65	330.0 kg	4200597
Helix FIRST V 3608-5/25/E/KS/	22.00 kW	DN 65	253.0 kg	4200596
Helix FIRST V 3608/2-5/25/E/KS/	22.00 kW	DN 65	253.0 kg	4200595
Helix FIRST V 3607-5/25/E/KS/	22.00 kW	DN 65	250.0 kg	4200594
Helix FIRST V 3607/2-5/25/E/KS/	18.50 kW	DN 65	250.0 kg	4200593
Helix FIRST V 3606-5/25/E/KS/	18.50 kW	DN 65	219.0 kg	4200592
Helix FIRST V 3606/2-5/25/E/KS/	15.00 kW	DN 65	208.0 kg	4200591
Helix FIRST V 3605-5/25/E/KS/	15.00 kW	DN 65	205.0 kg	4200590
Helix FIRST V 3605/2-5/25/E/KS/	15.00 kW	DN 65	205.0 kg	4200589
Helix FIRST V 2213-5/25/E/KS/	18.50 kW	DN 50	239.0 kg	4200581
Helix FIRST V 2212-5/25/E/KS/	15.00 kW	DN 50	226.0 kg	4200580
Helix FIRST V 2211-5/25/E/KS/	15.00 kW	DN 50	225.0 kg	4200579
Helix FIRST V 2210-5/25/E/KS/	15.00 kW	DN 50	223.0 kg	4200578
Helix FIRST V 2209-5/25/E/KS/	11.00 kW	DN 50	135.0 kg	4200577
Helix FIRST V 5206/2-5/16/E/KS/	15.00 kW	DN 80	261.0 kg	4215250
Helix FIRST V 5205-5/16/E/KS/	15.00 kW	DN 80	257.0 kg	4215249

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 5205/2-5/16/E/KS/	15.00 kW	DN 80	257.0 kg	4215248
Helix FIRST V 5204-5/16/E/KS/	15.00 kW	DN 80	214.0 kg	4215247
Helix FIRST V 5204/2-5/16/E/KS/	15.00 kW	DN 80	214.0 kg	4215246
Helix FIRST V 3606-5/16/E/KS/	15.00 kW	DN 65	219.0 kg	4215245
Helix FIRST V 3606/2-5/16/E/KS/	15.00 kW	DN 65	208.0 kg	4215244
Helix FIRST V 3605-5/16/E/KS/	15.00 kW	DN 65	205.0 kg	4215243
Helix FIRST V 3605/2-5/16/E/KS/	15.00 kW	DN 65	205.0 kg	4215242
Helix FIRST V 1611-5/16/E/KS/	7.50 kW	G 2	103.0 kg	4215241
Helix FIRST V 1610-5/16/E/KS/	7.50 kW	G 2	102.0 kg	4215240
Helix FIRST V 1609-5/16/E/KS/	7.50 kW	G 2	100.0 kg	4215239
Helix FIRST V 614-5/16/E/S/	3.00 kW	G 1¼	71.0 kg	4201160
Helix FIRST V 613-5/16/E/S/	3.00 kW	G 1¼	71.0 kg	4201158
Helix FIRST V 612-5/16/E/S/	3.00 kW	G 1¼	67.0 kg	4201155
Helix FIRST V 611-5/16/E/S/	2.20 kW	G 1¼	48.5 kg	4201152
Helix FIRST V 610-5/16/E/S/	2.20 kW	G 1¼	47.2 kg	4201149
Helix FIRST V 609-5/16/E/S/	2.20 kW	G 1¼	46.4 kg	4201146
Helix FIRST V 608-5/16/E/S/	1.50 kW	G 1¼	44.6 kg	4201143
Helix FIRST V 607-5/16/E/S/	1.50 kW	G 1¼	43.8 kg	4201140
Helix FIRST V 606-5/16/E/S/	1.10 kW	G 1¼	37.6 kg	4201137
Helix FIRST V 605-5/16/E/S/	1.10 kW	G 1¼	36.8 kg	4201134
Helix FIRST V 604-5/16/E/S/	0.75 kW	G 1¼	30.7 kg	4201131
Helix FIRST V 603-5/16/E/S/	0.55 kW	G 1¼	24.2 kg	4201128
Helix FIRST V 602-5/16/E/S/	0.55 kW	G 1¼	23.5 kg	4201125
Helix FIRST V 601-5/16/E/S/	0.37 kW	G 1¼	22.3 kg	4201123
Helix FIRST V 416-5/16/E/S/	2.20 kW	G 1½	56.0 kg	4201112
Helix FIRST V 414-5/16/E/S/	2.20 kW	G 1½	54.0 kg	4201109
Helix FIRST V 413-5/16/E/S/	2.20 kW	G 1½	53.0 kg	4201106
Helix FIRST V 412-5/16/E/S/	1.50 kW	G 1½	51.0 kg	4201103
Helix FIRST V 411-5/16/E/S/	1.50 kW	G 1½	49.7 kg	4201100
Helix FIRST V 410-5/16/E/S/	1.50 kW	G 1½	48.6 kg	4201097
Helix FIRST V 409-5/16/E/S/	1.10 kW	G 1½	42.1 kg	4201094
Helix FIRST V 408-5/16/E/S/	1.10 kW	G 1½	41.1 kg	4201091
Helix FIRST V 407-5/16/E/S/	1.10 kW	G 1½	40.1 kg	4201088
Helix FIRST V 406-5/16/E/S/	0.75 kW	G 1½	33.7 kg	4201085
Helix FIRST V 405-5/16/E/S/	0.75 kW	G 1½	32.7 kg	4201082
Helix FIRST V 404-5/16/E/S/	0.55 kW	G 1½	25.9 kg	4201079
Helix FIRST V 403-5/16/E/S/	0.37 kW	G 1½	23.8 kg	4201076
Helix FIRST V 402-5/16/E/S/	0.37 kW	G 1½	22.8 kg	4201073
Helix FIRST V 216-5/16/E/S/	1.50 kW	G 1½	46.1 kg	4201055
Helix FIRST V 214-5/16/E/S/	1.10 kW	G 1½	39.6 kg	4201052
Helix FIRST V 213-5/16/E/S/	1.10 kW	G 1½	39.5 kg	4201049
Helix FIRST V 212-5/16/E/S/	1.10 kW	G 1½	38.6 kg	4201046
Helix FIRST V 211-5/16/E/S/	1.10 kW	G 1½	38.2 kg	4201043
Helix FIRST V 210-5/16/E/S/	0.75 kW	G 1½	36.9 kg	4201040
Helix FIRST V 209-5/16/E/S/	0.75 kW	G 1½	36.4 kg	4201037
Helix FIRST V 208-5/16/E/S/	0.75 kW	G 1½	35.9 kg	4201034
Helix FIRST V 207-5/16/E/S/	0.55 kW	G 1½	29.7 kg	4201031

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 206-5/16/E/S/	0.55 kW	G 1½	24.7 kg	4201028
Helix FIRST V 205-5/16/E/S/	0.55 kW	G 1½	24.2 kg	4201025
Helix FIRST V 204-5/16/E/S/	0.37 kW	G 1½	22.7 kg	4201022
Helix FIRST V 203-5/16/E/S/	0.37 kW	G 1½	22.2 kg	4201019
Helix FIRST V 202-5/16/E/S/	0.37 kW	G 1½	21.7 kg	4201016
Helix FIRST V 1608-5/16/E/S/	5.50 kW	G 2	75.0 kg	4200999
Helix FIRST V 1607-5/16/E/S/	5.50 kW	G 2	73.0 kg	4200996
Helix FIRST V 1606-5/16/E/S/	4.00 kW	G 2	67.0 kg	4200993
Helix FIRST V 1605-5/16/E/S/	4.00 kW	G 2	66.0 kg	4200990
Helix FIRST V 1604-5/16/E/S/	3.00 kW	G 2	64.0 kg	4200986
Helix FIRST V 1603-5/16/E/S/	2.20 kW	G 2	45.1 kg	4200983
Helix FIRST V 1602-5/16/E/S/	1.50 kW	G 2	43.0 kg	4200980
Helix FIRST V 1601-5/16/E/S/	0.75 kW	G 2	32.0 kg	4200978
Helix FIRST V 1012-5/16/E/S/	5.50 kW	G ½	79.0 kg	4200966
Helix FIRST V 1011-5/16/E/S/	4.00 kW	G ½	74.0 kg	4200963
Helix FIRST V 1010-5/16/E/S/	4.00 kW	G ½	69.0 kg	4200960
Helix FIRST V 1009-5/16/E/S/	4.00 kW	G ½	69.0 kg	4200957
Helix FIRST V 1008-5/16/E/S/	3.00 kW	G ½	67.0 kg	4200954
Helix FIRST V 1007-5/16/E/S/	3.00 kW	G ½	66.0 kg	4200951
Helix FIRST V 1006-5/16/E/S/	2.20 kW	G ½	53.0 kg	4200948
Helix FIRST V 1005-5/16/E/S/	2.20 kW	G ½	53.0 kg	4200945
Helix FIRST V 1004-5/16/E/S/	1.50 kW	G ½	50.0 kg	4200942
Helix FIRST V 1003-5/16/E/S/	1.10 kW	G ½	33.3 kg	4200939
Helix FIRST V 1002-5/16/E/S/	0.75 kW	G ½	31.6 kg	4200936
Helix FIRST V 1001-5/16/E/S/	0.55 kW	G ½	25.6 kg	4200934
Helix FIRST V 3601/1-5/16/E/KS/	2.20 kW	DN 65	79.0 kg	4200588
Helix FIRST V 2201-5/16/E/KS/	1.50 kW	DN 50	64.0 kg	4200576
Helix FIRST V 5203-5/16/E/S/	11.00 kW	DN 80	139.0 kg	4183427
Helix FIRST V 5203/2-5/16/E/S/	11.00 kW	DN 80	139.0 kg	4183426
Helix FIRST V 5202-5/16/E/S/	7.50 kW	DN 80	115.0 kg	4183425
Helix FIRST V 5202/2-5/16/E/S/	5.50 kW	DN 80	105.0 kg	4183424
Helix FIRST V 5201-5/16/E/S/	4.00 kW	DN 80	91.0 kg	4183423
Helix FIRST V 5201/1-5/16/E/S/	3.00 kW	DN 80	90.0 kg	4183422
Helix FIRST V 3604-5/16/E/S/	11.00 kW	DN 65	136.0 kg	4183392
Helix FIRST V 3604/2-5/16/E/S/	11.00 kW	DN 65	136.0 kg	4183391
Helix FIRST V 3603-5/16/E/S/	9.00 kW	DN 65	124.0 kg	4183390
Helix FIRST V 3603/1-5/16/E/S/	7.50 kW	DN 65	108.0 kg	4183389
Helix FIRST V 3603/2-5/16/E/S/	7.50 kW	DN 65	108.0 kg	4183388
Helix FIRST V 3602-5/16/E/S/	5.50 kW	DN 65	91.0 kg	4183387
Helix FIRST V 3602/1-5/16/E/S/	5.50 kW	DN 65	91.0 kg	4183386
Helix FIRST V 3602/2-5/16/E/S/	4.00 kW	DN 65	85.0 kg	4183385
Helix FIRST V 3601-5/16/E/S/	3.00 kW	DN 65	82.0 kg	4183384
Helix FIRST V 2208-5/16/E/S/	11.00 kW	DN 50	131.0 kg	4183362
Helix FIRST V 2207-5/16/E/S/	9.00 kW	DN 50	127.0 kg	4183361
Helix FIRST V 2206-5/16/E/S/	7.50 kW	DN 50	106.0 kg	4183360
Helix FIRST V 2205-5/16/E/S/	7.50 kW	DN 50	105.0 kg	4183359
Helix FIRST V 2204-5/16/E/S/	5.50 kW	DN 50	93.0 kg	4183358

Product list: Wilo-Helix FIRST V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix FIRST V 2203-5/16/E/S/	4.00 kW	DN 50	81.0 kg	4183357
Helix FIRST V 2202-5/16/E/S/	3.00 kW	DN 50	78.0 kg	4183356