




# Bravo 400

Electrical submersible slurry pump

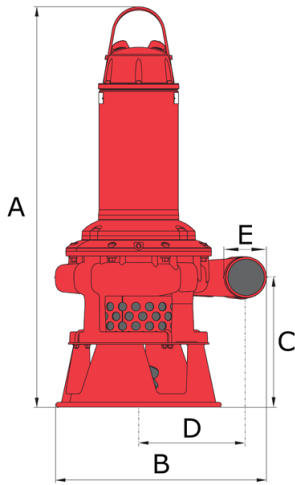

50 Hz	Bravo 400
Discharge connection E	4"
Rated power $P_2$	13,5
Max. power consumption $P_1$	16
Shaft speed	1455
Rated current at 230V	47 A
Rated current at 400V	28 A
Rated current at 500V	21 A
Solids passage	30 mm
Dimensions A / B / C / D	1148 / 595 / 337 / 265 mm
Weight	231 kg

Other voltages on request

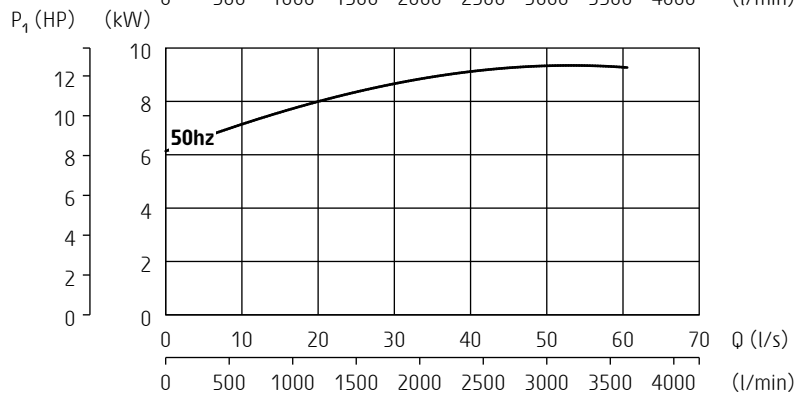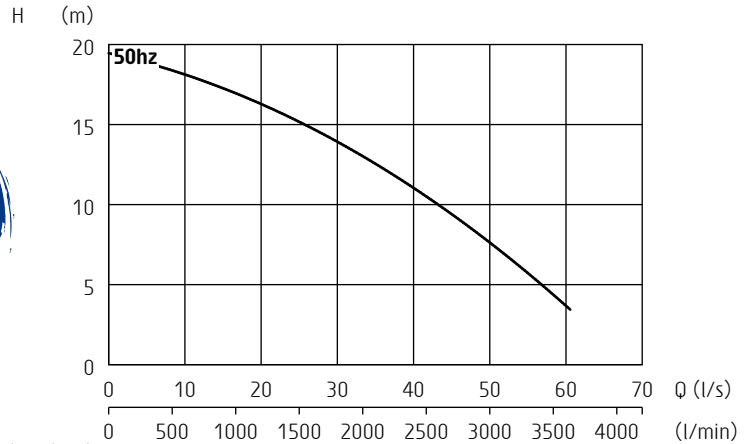

ISO 9906/A

## General description

Pump with closed impeller and agitator for reliable pumping of highly abrasive slurry in high concentrations

## Classification

Electrical submersible slurry pump  
Protection class: IP 68

## Electrical motor

Squirrel cage induction motor  
Insulation class: H (IEC 85), DOL or star/delta

## Motor protection

Thermoswitches in motor windings

**This pump must be used with external motor protection in accordance with technical data**

## Cable - SubCab 20 m (66 ft)

230V DOL: 4x10mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
230V Y/D: 7x6mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
400-500V DOL: 4x6mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
400-500V Y/D: 7x4mm<sup>2</sup> + 2x1.5mm<sup>2</sup>

## Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: tungsten carbide - tungsten carbide  
Material upper seal: tungsten carbide - tungsten carbide

## Materials

Drive unit: *Cast iron*  
Pump housing: *Hard-Iron™*  
Impeller: *Hard-Iron™*  
Lifting handle: *Stainless steel*  
Shaft: *Stainless steel*  
Agitator: *Hard-Iron™*  
Studs, screws and nuts: *Stainless steel*  
O-rings: *Nitrile rubber*

## Limitations

Max. submersion depth: 20 m (66 ft)  
Max. liquid temperature: 40 °C (104 °F)  
Allowed pH range: 5.5 - 14

Specifications can be changed without notice